


PL-2000 MULTI-FREQUENCY PIPE & CABLE LOCATOR

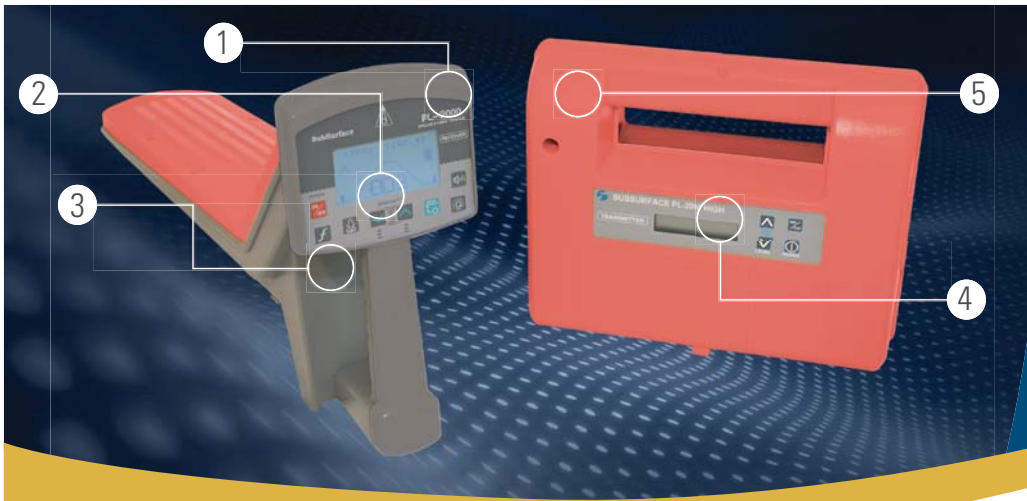

KEY FEATURES

- 1 Receiver
- 2 Receiver's Control Panel
- 3 Speaker
- 4 Transmitter's Control Panel
- 5 Transmitter

FEATURES

- ▶ The PL-2000 Low Transmitter has 3.0 watts power output in the Direct Connection Mode, allowing locates for much longer distances than the lower power typical in other transmitters.
- ▶ The light-weight, balanced PL-2000 Receiver, offers 4 different operating modes: "Peak" mode, for the most accurate locates and for depth measurement; "Null" mode, for fast, easy tracking; "Dist" mode, for even longer distances; "Sonde" mode, for locating sewer sondes and measuring their depths.
- ▶ The PL-2000 has 3 "active" frequencies at 512 Hz, 8.125 kHz, and 26.725kHz; plus 2 "passive" frequencies at 50/60 Hz (current flowing A/C) and Radio (15 khz - 25 kHz).
- ▶ Simultaneously transmit all 8.125 kHz, 26.725 kHz, and .5kHz in the "Mix" mode in the Transmitter.
- ▶ Detects poor "ground" conductivity at the Transmitter in the Direct Connection operating mode.
- ▶ Current measurement in the depth function indicates if the measured depths are correct for congested utilities.
- ▶ "Auto Off" functions in both the Transmitter and Receiver shut off their operations after a set time period if they are accidentally left "On".



SPECIFICATIONS

TRANSMITTER

- ▶ FREQUENCY: 26.725 kHz, 8.125 kHz, and 512 Hz
- ▶ OUTPUT POWER: 0.5 watts Inductive Mode
3.0 watts Direct Mode
- ▶ TRANSMITTING MODE: Continuous Wave (non-modulating)
- ▶ ANTENNA: Single Coil Antenna
- ▶ POWER SUPPLY: DC 12-volts (8 "D" batteries or external 12-v battery)
- ▶ BATTERY LIFE: 20 hours Typical (Alkaline)
8 hours at Max Power
- ▶ WEIGHT: 5.5 lbs (2.49 Kg)
- ▶ SIZE: 11"w x 9.5"h x 4.1"d

RECEIVER

- ▶ FREQUENCY: 26.725 kHz, 8.125 kHz, and 512 Hz
- ▶ OUTPUT POWER: 0.5 watts Inductive Mode
3.0 watts Direct Mode
- ▶ TRANSMITTING MODE: Continuous Wave (non-modulating)
"Radio" mode: 15 kHz - 25 kHz
"Live Cable" mode: 50/60 Hz AC
- ▶ OPERATING MODES: "Peak", "Null", "Dist", and "Sonde"
- ▶ POWER SUPPLY: DC 9 Volts (6 "AA" batteries)
- ▶ BATTERY LIFE: 8 hours Continuous (Alkaline)
- ▶ WEIGHT: 4.4 lb (2.04 Kg)
- ▶ SIZE: 5.2"w x 11"h x 24"L

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес: sca@nt-rt.ru | <http://subsurface.nt-rt.ru>